


# FACTORY FINISHED PANELS

## woodcore panel › alufoil backing

panneau en aggloméré de bois › feuille alu

baldosa aglomerado de madera › lamina de aluminio

pannello in conglomerato ligneo › lamina di alluminio

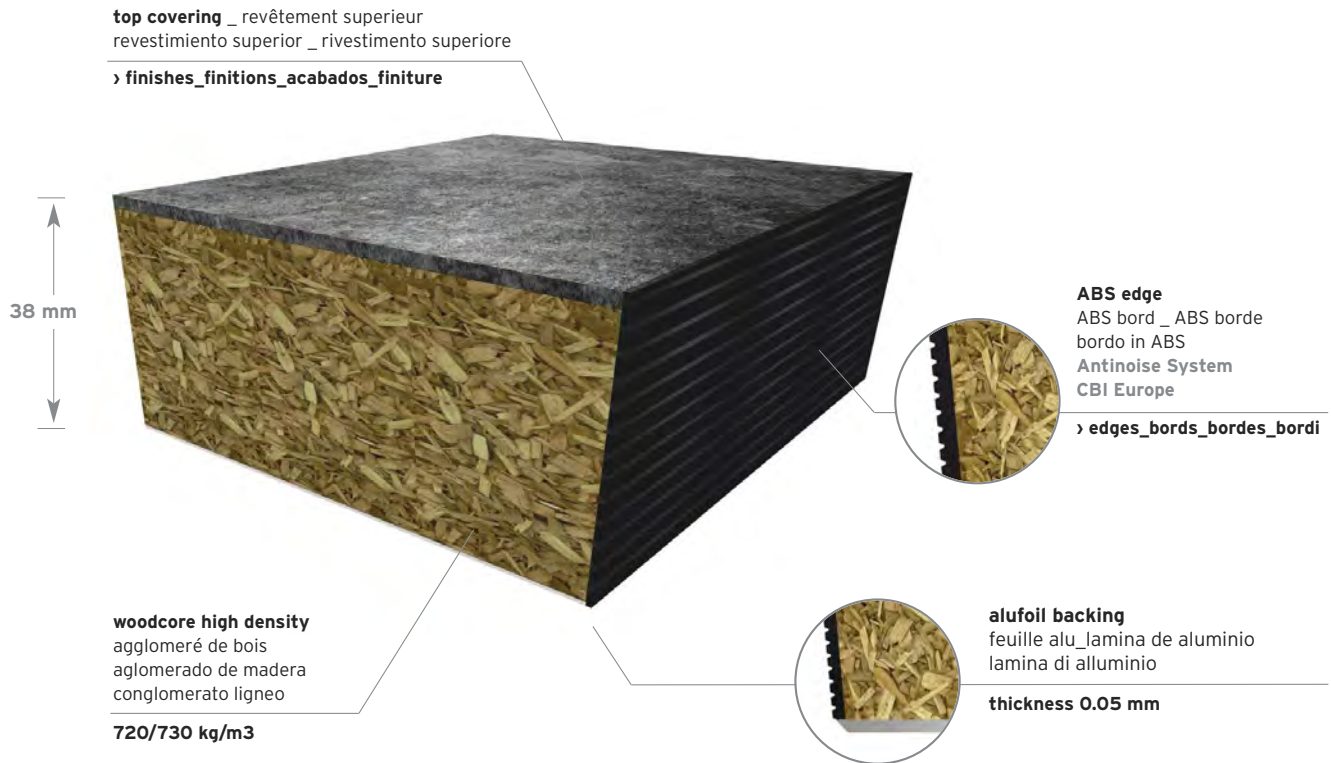

### PANEL SPECIFICATION ACCORDING TO EN 12825:2003

	L	P	H	Kg/m <sup>2</sup>	fire reaction reazione al fuoco euro class	fire resistance resistenza al fuoco euro class	structure CR_CBI	structure IF	structure CR_CBI	class*	structure IF	EN 140-8 impact noise**
<b>panelbacking, alu foil</b> dôds du panneau en aluminium sopporto inferior de aluminio rivestimento inferiore in alluminio	<b>PT38A</b>	60 x 60	<b>38</b>	28	Bfl-s1	REI 30	4,116	4,704	14,180	6	14,460	24 dB

**(KN)** point load 2,5 mm deflection, center of panel \_ charge concentrée de 2,5 mm \_ carico concentrato a 2,5 mm **(KN)** ultimate load \_ charge ponderée \_ carico concentrato a rottura

\* the class refers to the concentrated load at the breaking point in the middle of the panel \_ la classe se réfère à la charge concentrée de rupture, situé au centre du panneau \_ la classe è riferita al carico concentrato a rottura al centro del pannello.

\*\* according to UNI EN ISO 717-2:2007 \_ conformément à UNI EN ISO 717-2:2007\_riferimento normativa UNI EN ISO 717-2:2007

**Panel:** woodcore high density 720/730 kg/m3 +/- 3%. **Dimensions:** 600X600X38 mm. **Top Covering:** to be selected by the project manager on end-user. **Bottom covering:** alufoil thickness 0.05 mm. **Panel edge:** in ABS thickness 0.5 mm. (for ceramic tiles, marble and granite coverings: ABS thickness 0,8 mm.) Colors: black, beige, grey.

**Panneau:** aggloméré de bois à haute densité 720/730 kg/m3 +/- 3%. **Dimensions:** 600X600X38 mm. **Revêtement supérieur:** choisi par la Direction Travaux selon le catalogue "Floors" de CBI Europe SpA. **Dôds du panneau:** feuille alu 0,05 mm. **Bord perimetral:** ABS épaisseur 0,5 mm. (pour revêtements en grès, granite, marbre: ABS épaisseur 0,8 mm. Couleurs: noir, beige, gris.

**Baldosa:** aglomerado de madera alta densidad 720/730 kg/m3 +/- 3%. **Dimensiones:** 600X600X38 mm. **Revestimiento superior:** será elegir por el director del proyecto y seleccionado de catálogo de CBI Europe SpA "Floors". **Sopporto inferiore:** Lamina de aluminio 0,05 mm. **Cantos:** ABS espesor 0,5 mm. (para revestimientos de cerámica, granito e mármol: ABS espesor 0,8 mm.) Colores: negro, beige, gris.

**Pannello:** conglomerato ligneo ad alta densità 720/730 kg/m3 +/- 3%. **Dimensioni:** 600X600X38 mm. **Rivestimento superiore:** a scelta della D.L. in qualsiasi tipo di rivestimento del catalogo Floors CBI Europe SpA. **Rivestimento inferiore:** lamina di alluminio 0,05 mm. **Bordatura pannello:** ABS spessore 0,5 mm. (per rivestimenti in ceramica, marmo, granito: ABS spessore 0,8 mm. Colori: nero, beige, grigio.





# ZAYAANCO

Suite No. 704, Orange Tower,  
Next to National Paint Factory, P. O. Box  
72936, Sharjah, U.A.E.  
Hotline : +971 5555 6 4004  
Tel No. : +971 6 569 17 57  
info@zayaanco.com, www.zayaanco.com

High quality raised access flooring Dubai | Architectural finished raised flooring specialist in Abu Dhabi | Marble finish raised access floor stockiest UAE | Antistatic raised access floor manufacturer in Sharjah | Ceramic finish raised floor suppliers Al Ain | Glass finish raised access floor traders Fujairah | Granite finish raised access floor companies RAK | Bamboo finish raised access floor installers Dubai | Laminate finish raised access floor contractors Abu Dhabi | Rubber finish raised access floor specialist Dubai | Linoleum finish raised access floor stockiest Al Ain | Vinyl finish raised access flooring manufacturer Sharjah | Long line raised access flooring suppliers Dubai | Trunking base steel raised access floor installers Dubai | Internal raised access flooring suppliers UAE | Concrete filled raised access floor traders Al Ain | Panels raised access flooring specialist UAE | PVC covering raised access floor stockiest Abu Dhabi | Steel raised access flooring supplier Dubai | Exterior raised access flooring system in UAE | Under floor air distribution supplier UAE | Server room raised floor installers Dubai | Calcium Sulphate raised floor manufacturer Abu Dhabi | Wood core raised floor traders Dubai | Linder raised floor contractor Dubai | Perforated raised access floor companies Abu Dhabi | Steel cementations raised floor suppliers UAE | High long pedestal installers Dubai | Anti-static raised access floor specialist Dubai | Vinyl covering raised access flooring suppliers UAE | Wooden raised access flooring companies Dubai | Bare finish raised access floor suppliers Dubai | PVC steel raised access floor manufacturer Sharjah | Steel laminated panel raised floor stockiest Dubai | HPL finish raised flooring traders Dubai | Flooring Adhesives in Dubai | Self leveling contractors in UAE | Flooring installer in Abu Dhabi | Flooring contractors Dubai | Flooring suppliers in Dubai | Flooring solutions Dubai | Acoustic multi-layer flooring solutions Dubai | Educational acoustic Dubai | Antistatic flooring UAE | Commercial flooring Abu Dhabi | Contract flooring Dubai |

[www.zayaanco.com](http://www.zayaanco.com)