

CUF-250C

Advanced Clamp-on Transit Time Technologies

ULTRASONIC THERMAL ENERGY METER


Features:

- Energy rate and total consumption measurement
- Non-intrusive clamp-on technology. Easy and economical installation
- No moving parts to worn out. Long-life span. Maintenance-free
- High accuracy. Custody-transfer performance
- Wide flow measurement range, bi-directional
- Built-in totalizers, batch controllers and task scheduler
- Isolated RS-485 interface. Supports the MODBUS protocol
- Abundant input/output, such as 4-20mA output, relay output, pulse output, alarm output, etc.
- Suitable for pipes from 0.5" to 240"
- Optional wireless capability
- Optional remote data collection/billing software
- Easy to use and set up. Self-explanatory menu-driven programming
- NEMA 4X (IP65) weather-resistant enclosure
- Suitable for virtually any liquid heating/cooling systems such as HVAC, office buildings, apartment complexes, condominiums, solar heating systems and geothermal systems

The CUF-250C ultrasonic thermal energy meter provides abundant capabilities for accurate thermal energy measurement of a liquid-based thermal energy production / transferring system. It is the 3rd generation energy meter from CBRO. Compared with its predecessors, the 3rd generation offers better performance and a richer feature set, all at a lower price.

The CUF-250C system is consisted of the high performance ultrasonic flow meter and a pair of standard PT100 temperature sensors. The ultrasonic flowmeter is based on our cutting-edge clamp-on flow measurement technology, which is capable of measuring the flow from outside of a pipe accurately and reliably. Due to the non-intrusive nature of this technology, there is no pipe cutting, no moving parts, no pressure drop, no leaks and no risk of contamination. In addition, the installation is simple and requires no special skills or tools.

The two PT100 sensors, which can be either insertion type or surface-mounting type, are used to measure the

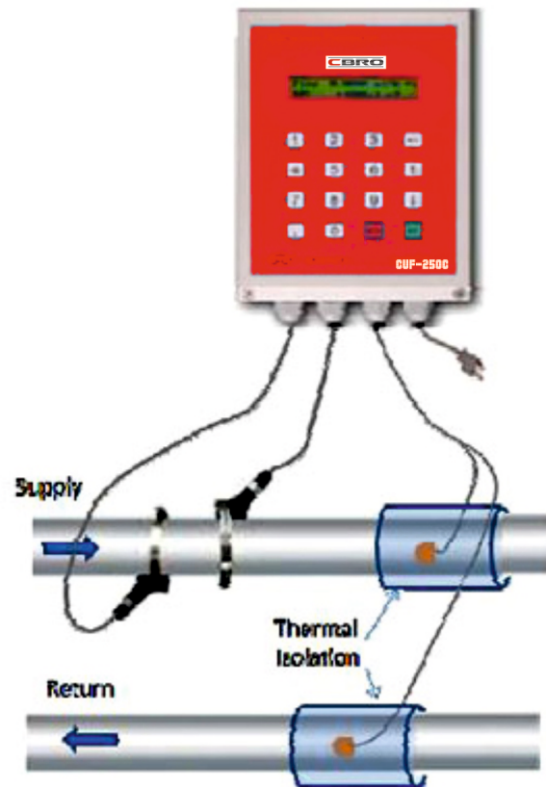

CLAMP-ON ENERGY METER

temperature of the supply flow and the return flow. The energy consumption rate is then calculated based on the temperature difference and the measured flowrate. A built-in energy totalizer is used to add up the amount of energy delivered.

CUF-250C provides versatile input/output interfaces, such as isolated digital outputs, relay output, batch control, alarm, 4-20mA output. In addition, the built-in isolated RS-485 port with surge protection and MODBUS support makes remote energy monitoring and energy meter networking easy and reliable.

With optional wireless module and CBRO's data collection/billing software, CUF-250C can be used to manage energy production/consumption systems remotely and automatically.

CUF-250C is an ideal choice for improving HVAC, energy production and building energy efficiency in terms of heating, cooling ventilation and air-conditioning.

SPECIFICATIONS

Main Unit	Repeatability	Better than 0.2%
	Accuracy	For flow measurement: $\pm 1\%$ of reading, plus $\pm 0.006\text{m/s}$ ($\pm 0.02\text{ft/s}$) in velocity
	Response Time	0.5s. Configurable between 0.5s and 99s
	Velocity	$-16 \sim +16\text{m/s}$ ($-52 \sim +52\text{ ft/s}$), bi-directional
	Display / Keypad	LCD with backlight. 2 x 20 letters. 4 x 4 tactile-feedback membrane keypad. Displays instantaneous energy rate, total energy (positive, negative and net), temperatures, flow rate, time, analog inputs, etc.
	Units	English (U.S.) or metric
	Signal Outputs	Current output: 4-20mA isolated output for energy rate, flowrate, velocity or sound speed. Impedance 0-1k. Accuracy 0.1%
		OCT output: isolated Open Collector Transistor output. Up to 0.5A load Relay output: 1A@125VAC or 2A@30VDC Can be programmed as pulse signal for energy/flow totalization; ON/OFF signal for relay drive or alarm drive; batch control
		Sound alarm
	Temperature and other Analog Inputs	RTD interface: two temperature channels that can accommodate two PT100 3-wire temperature sensors for thermal energy measurement. Analog input: one channel of 4-20mA input. Can be used for temperature, pressure and level
Liquids	Recording	Automatically records the totalizer data of the last 128 days / 64 months / 5years Optional USB data logger available upon request
	Communication Interface	Isolated RS-485 with power surge protection. Supports the MODBUS protocol StufManager™ PC software for real-time data acquisition (optional) Optional wireless module (GPRS/GSM/Rf) for remote monitoring (STUF-300RnB only)
	Enclosure	Protection Class: IP65 (NEMA 4X) weather-resistant. Additional protection enclosure (large polycarbonate enclosure) available upon request (STUF-300R2B model only). Dimension: 230mm x 150mm x 75mm (9" x 5.9" x 3")
Pipe	Liquid Types	Virtually all commonly used liquids (full pipe)
	Liquid Temp	$-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$ or $-40^{\circ}\text{C} \sim 155^{\circ}\text{C}$, depending on transducer type
	Suspension concentration	$<20,000\text{ppm}$, or, $< 2\%$, particle size smaller than 100um.
Cable	Pipe Size	DN15 ~ DN6,000mm (0.5" ~ 240"), depending on transducer type
	Pipe Material	All metals, most plastics, fiber glass, etc. Allow pipe liner.
	Straight Pipe Section	Longer than 15D, where D is pipe diameter. If a pump or a valve is nearby upstream, the straight pipe section following the pump should be $> 25\text{D}$.
Environment	Shielded transducer cable. Standard length 15' (5m) Can be extended to 1640' (500m). Contact the manufacturer for longer cable requirement.	
	Temperature	Main unit: $-10^{\circ}\text{C} \sim 70^{\circ}\text{C}$ ($14^{\circ}\text{F} \sim 158^{\circ}\text{F}$)
		Ultrasonic Transducer: $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim 212^{\circ}\text{F}$) for standard version $-40^{\circ}\text{C} \sim 155^{\circ}\text{C}$ ($-40^{\circ}\text{F} \sim 312^{\circ}\text{F}$) for higher temperature version PT100 temperature sensor: $-40^{\circ}\text{F} \sim 312^{\circ}\text{F}$ ($-40^{\circ}\text{C} \sim 155^{\circ}\text{C}$)
Power	Humidity	Main unit: 85% RH
		Ultrasonic Transducer: water-immersible, water depth less than 10' (3m)
Weight	DC: 12 ~ 24VDC, or, AC: 90 ~ 260VAC Power consumption: $< 1.5\text{W}$ at 12VDC	
	Main unit: 2 kg (4 lbs) for standard version, 2.5kg (5 lbs) for network version	








APPLICATIONS:


The CUF-250C thermal energy measurement system is an ideal choice for a wide range of applications in HVAC, energy production, energy transfer, building management, university facility management, district heating and cooling, geothermal or solar-thermal system monitoring, and all other liquid-based thermal energy production/transferring.

Some examples are:

- Chilled water sub-metering
- Hot water sub-metering
- Condenser water
- Glycol
- Thermal storage
- Geothermal system
- Solar hot-water system
- Lake source cooling
- Chemical feed, ammonia feed
- Energy meter network
- Power plants

TRANSDUCER OPTIONS:

	Type HFx: Special transducer for small size pipes DN15 ~ DN25mm (0.5" ~ 1") Temperature range -20C ~ 60°C (-40F ~ 140°F) <i>x represents pipe material: 0-Copper; 1-Tubing; 2-ANSI Plastic; 3-ANSI Metal</i>
	Type S1x: Standard-S1 Transducer (magnetic) for pipes DN25 ~ DN100mm (1" ~ 4") Temperature range -40C ~ 80°C (-40F ~ 175°F) <i>x represents pipe material. Same as above</i>
	Type S1HTx: High-temp S1 Transducer for small size pipes DN25 ~ DN100mm (1" ~ 4") Temperature range -40C ~ 155°C (-40F ~ 312°F) <i>x represents pipe material. Same as above</i>
	Type M1: Standard-M1 Transducer (magnetic) for medium size pipes DN50 ~ DN700mm (2" ~ 28") Temperature range -40C ~ 80°C (-40F ~ 175°F)
	Type M1HT: High-temp M1 Transducer for medium size pipes DN50 ~ DN700mm (2" ~ 28") Temperature range -40C ~ 155°C (-40F ~ 312°F)
	Type L1: Standard-L1 Transducer for large size pipes DN300 ~ DN6,000mm (11" ~ 240") Temperature range -40C ~ 80°C (-40F ~ 175°F)
	PT100SM: Surface-mount temperature sensor, 3-wire PT100 Thermal isolation around the sensor is recommended in order to get a temperature reading close to the liquid temperature



PT100IN: Insertion type temperature sensor, 3-wire PT100
Users may use their own RTD temperature sensor

MODEL SELECTION:

CUF-250C

TransducerA

HFx – Special transducer for 0.5"–1"
S1x – Standard S1-type for pipes 1" – 4"
S1HTx – High-temperature version of the S1-type
M1 – Standard M1-type for pipes 2" – 28"
M1HT – High-temperature version of the M1-type
xA represents a pipe material: A 9mCopper; A / –Tubing; A (–ANSIA Plastic; A)mANSIAMetal

Temperature Sensor:

PT100SM – With a pair of PT100 sensors, surface-mount
PT100IN – With a pair of PT100 sensors, insertion mount
NO or absent – No temperature sensor

Pipe Size:

DNxxx (metric) or INxxx (English)

Transducer Cable Length :

Mxx – Cable length in meters
Fxx – Cable length in ft

4-20mA Output :

AO – With 4-20mA output
NAO or absent – No 4-20mA output

Other Options:

RL – With relay
DL – With USB data logger
SW – StuffManager™ PC software
485USB – RS485-to-USB convertor

Example : Model - CUF-250C -M1-PT100SM-DN100-M5-AO-DL stands for standard main unit, M1-type clamp-on transducer and PT100 surface-mount sensor for pipe size DN100mm, 5 meter transducer cables, with 4-20mA and USB data logger outputs.

Note: If you prefer to work with the English system for the model number, please put "IN" (for inch) or "F" (for foot) right before the dimension values. For example, the above model# in the English system will be:
CUF-250C-M1-PT100SM-IN4-F15-AO-DL

Users :



INDIA



SAUDI ARABIA



SINGAPORE



UAE



USA



INDONESIA



MALAYSIA

Manufactured by :

CBRO INCORPORATION

Reg. Corr. Address : B-204, Princeton Tower, Hiranandani Estate,
G. B. Road, Dist - Thane - (W) - 400607, INDIA.

Telefax : +91 251 2271336, Cell : +91 9321727262



www.cbroidia.com