



# Holux<sup>®</sup>



**Sliding Door System X3'**



### Innovative pedestrian entrance

Our innovative pedestrian entrance operator HOLUX X3 impresses with the minimum operator height. Which represents the new generation of automatic sliding doors in the world.

### Applications

- Hotels
- Hospitals
- Public centers
- Recreational centers
- Governmental buildings
- Chain stores


**Sliding Door System X3**

## Technical data

Operator height	120 mm
Operator depth	145 mm
Passage width	800 - 3000 mm
Max. Leaf weight	1 x 150 kg / 2 x 100 kg
Track profile	detachable Aluminum with antinoise rubber profile
Power supply	220-+%10 50-60 Hz
Hold open time	0 - 30 sec (adjustable)
Opening speed	100 - 600 mm/s
Closing speed	100 - 500 mm/s
Ambient temperature	-15 to +50°C
Protection class	20 IP
Electromechanical lock	option


## Features

### Control unit

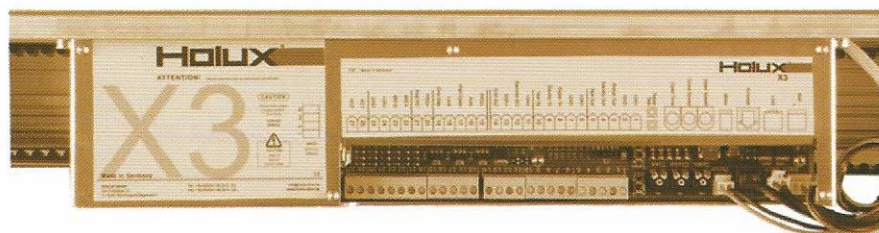

Microprocessor controllers of Holux X3 are made in Germany to fulfil European standards, EN 16005. It has the ability to be connected to all types of sensors and also it is adjustable for either normal doors or escape ones.

### **Gear motor**

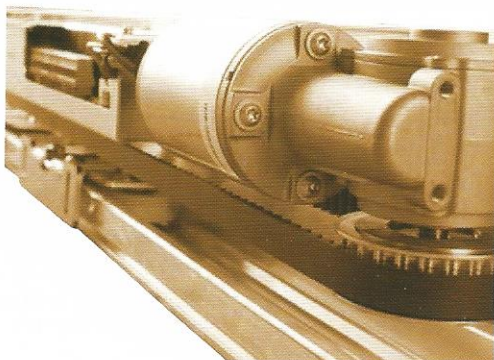


Holux X3 motor unit (50W) is made by German manufacturer, Dunkermotoren. It assures you with both durability and high efficiency.

### **Aluminum rail profile**

Detachable track profile made of aluminum used with a rubber profile, Which greatly reduces the noise and facilitates entry and exit, therefore Prevents energy loss.




### **Electromechanical lock (optional)**

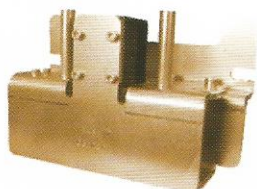


Electromechanical lock with the ability to lock the automatic doors by using the hangers.

## **Sliding Door System X3**

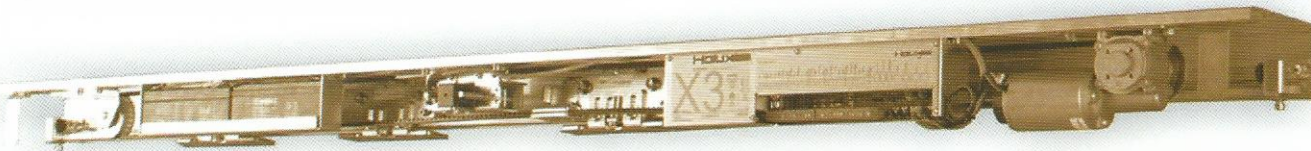

### Back-up battery module (optional)

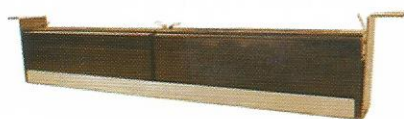


Functionality of the battery depends on door weight and traffic. However, in case of power failure this battery can open and close your door up to 600 times.

### LCD programmer (optional)

Optional LCD programmer control panel for perfect adjustment of operator with protection password code.



### Key switch programmer (optional)

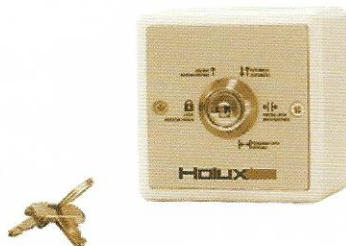

These five function key switches (optional) are fast and easy to install and use. (Incl. two removable keys)

## Sensors (optional)



BEA IXIO-D3 combined safety- & activation sensor



BEA IXIO-D1 combined safety- & activation sensor



BEA VIO combined safety- & radar technology



BEA ZENSAFE combined safety- & activation sensor



BEA ZEN activation sensor




BEA Eagle6 activation sensor



BEA MW6 activation sensor



BEA Microcell 1s sensor



Distributor



Achilandoor Trading L.L.C  
2008. XL Tower, Business Bay.  
Dubai U.A.E.

E-Mail: [info@achilandoormena.com](mailto:info@achilandoormena.com)  
Website: [www.achilandoormena.com](http://www.achilandoormena.com)

**Sliding Door System X3**