

CEILING & FLOOR A/C UNITS


Features

- Anti-Cold Air Function
- Independent Dehumidification
- Auto Restart Function
- Auto Defrosting
- Timer
- Sleep Mode



CEILING AND FLOOR A/C UNITS Technical Specifications

Indoor			GUBT-24	GUBT-36	GUBT-48	GUBT-60
Outdoor			GUBT-24	GUBT-36	GUBT-48	GUBT-60
Power supply		V-ph-Hz	220-240-1-50	220-240-1-50	380-420-3-50	380-420-3-50
Cooling	Capacity	Btu/h	24000	36000	48000	60000
	Input	W	2731	3962	5185	6480
	Rated current	A	5.5	10.0	13.6	16
	EER	W/W	2.6	2.65	2.7	2.71
Indoor air flow (Hi/Mi/Lo)		m3/h	1089/819/512	1298/1062/915	2000/1700/1500	2150/1900/1700
Indoor noise level (Hi/Mi/Lo)		dB(A)	51/49/45	51/49/46	53/50/47	53/50/47
INDOOR UNIT	Dimension (W*D*H)	mm	990x660x203	1280x660x203	1670x680x240	1670x680x240
	Net/Gross weight	Kg	25/31	31/38	44/51.5	45/52.5
OUTDOOR UNIT	Compressor type		Rotary	Scroll	Scroll	Scroll
Outdoor fan motor	Model		YDK53-6KB(B)	YDK75-6C	YDK65-6F(B)	YDK65-6F(B)
	Qty		1	1	2	2
	Speed	r/min	950	860	765	765
Outdoor air flow (Max.)			2700	4200	6200	6500
Outdoor noise level (Sound Pressure)			56	58	61	62
Outdoor unit	Dimension (W*D*H)		845x320x700	900x315x860	900x350x1170	900x350x1170
	Net/Gross weight	Kg	45/49	64/68	91.5/103	96/107
Refrigerant type / quantity	Type		R22	R22	R22	R22
	Liquid Side/Gas Side		Ø9.52/Ø15.9(3/8"/5/8")	Ø9.52/Ø19(3/8"/3/4")	Ø9.52/Ø19(3/8"/3/4")	Ø9.52/Ø19(3/8"/3/4")
Ambient Temperature	Ambient	INDOOR	17-32	17-32	17-32	17-32
	Temperature	OUT DOOR	18-52	18-52	18-52	18-52

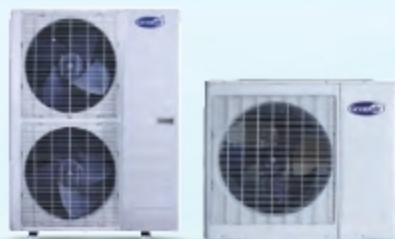

GEO ELECTRICAL
CONTRACTING TRADING CO. L.L.C
P.O. BOX: 3189, SHARJAH - U.A.E.



GEO GLOBAL FZE
P.O. Box 17109, Jebel Ali Free Zone Dubai, United Arab Emirates
Phone: +971 4 8838300, Fax: +971 4 8838301
Email: info@geoglobal.net Website: www.geoglobal.net

